**resideo**

## Product information

For pressure reduction of air and neutral gases. Pressure reducing valve for compressed air with standard pattern and piston-balanced seat, type D22.

Dimension range (DN)	8 - 50
PN	25 - 40
Temperature (°C)	0 - 70
Main material	Brass



## Area of use

For pressure reduction of air and neutral gases: AT 4235.

Pressure reduction valves of this type protect installations from excessive pressure from the supply. They can be used for industrial or commercial applications within their specification. If an overpressure occurs on the outside of the pressure reduction valve and the system in the subsequent stage needs to be protected, a safety valve should be installed.

## Tender text

### **PSE.23 Pressure operated valves in gas systems**

Reducing valve AT 4235..., made of brass, adjustable low pressure 1-10 bar.

For air.

Accessories:

Pressure gauge for AT 4235, 4235F: AT 4257-8-....., graduated 0-.....bar.

## Quality assurance

**Product marking:** Brand, connection, and arrow indicating flow direction.

## Energy and environment declaration

**SundaHus:** C-


**Reach notification obligation**

**Reach date:** 6/14/2023 12:00:00 AM

## Measurements and weight

**Dimension range (DN):** 8 - 50

DN	A	B	C
10	50	34	90
15	65	36	105
20	80	42	105
25	95	42	105
32	105	57	160
40	115	72	210
50	130	72	210

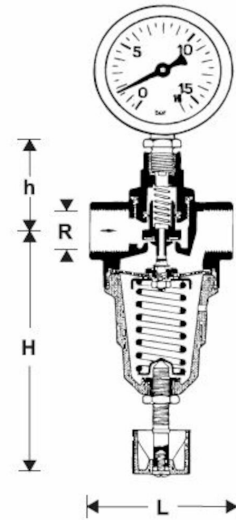

## Function and design

The valve has a built-in dirt filter with a mesh width of 0.16 mm (not applicable to AT 4235). The cone is relieved, which provides constant low pressure even with varying high pressure. The valve is tight at zero consumption and the low pressure is constant. The valve housing has two outlets for measuring low pressure (one outlet for AT 4235).

AT 4166, 4167 are equipped with a coupling nut for connection. A pressure gauge is only included upon separate order.

## Technical data

**Main material:** Brass

**Included materials:** Brass, Plastic


**Included material code:** PA (polyamide)

**Temperature (°C):** 0 - 70

**PN:** 25 - 40

**Connection:** Internal thread ISO 228-1 (G, BSPP), External thread ISO 228-1 (G, BSPP)

**ETIM classification:** EC010122 - Pressure reducing valve

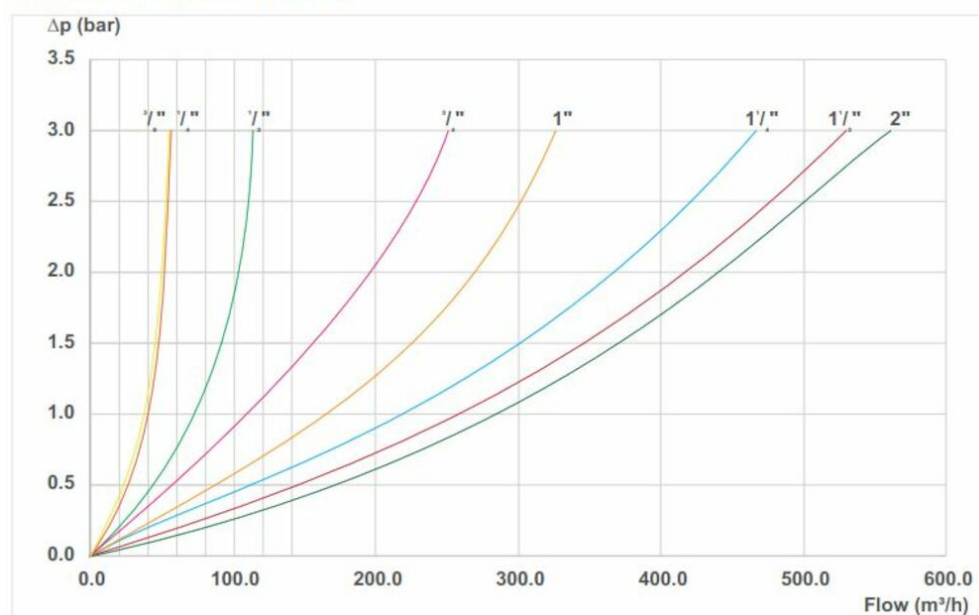**TECHNICAL CHARACTERISTICS**

## Installation and maintenance

**Flow direction:** Uni-directional

**Possible mounting position:** Horizontal

Can be installed in any built-in position. For AT4166 and 4167, the filter should be mounted downwards.

Refer to the user manual.

Please feel free to contact us

We answer your questions by e-mail and telephone. No question is too small, no challenge is too big. You are always welcome at Armatec.

[info@armatec.se](mailto:info@armatec.se) | +46 31 89 01 00 | [www.armatec.se](http://www.armatec.se)

THE COMPANY'S MANAGEMENT SYSTEM  
IS CERTIFIED BY DNV  
ISO 9001 • ISO 14001