
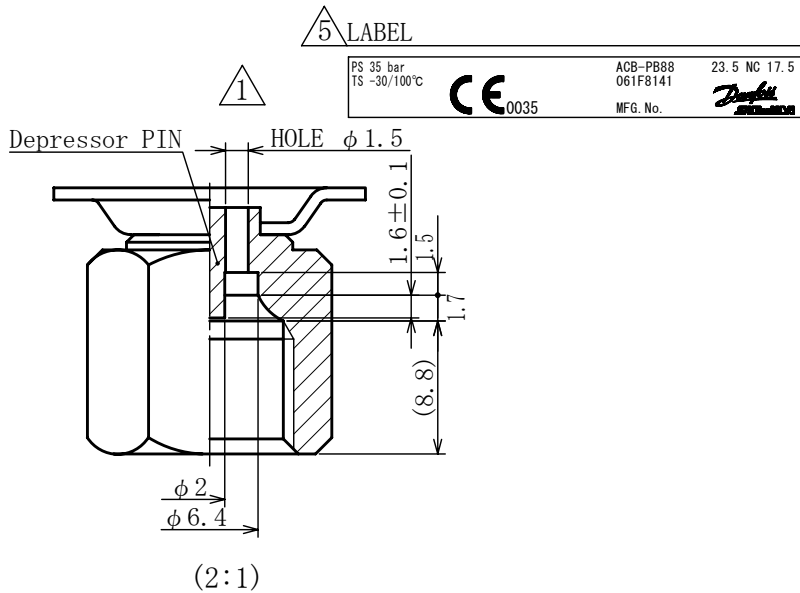


HEAT PROOF ELECTRIC VINYL WIRE
UL1015, AWG18, 105°C (BLACK)

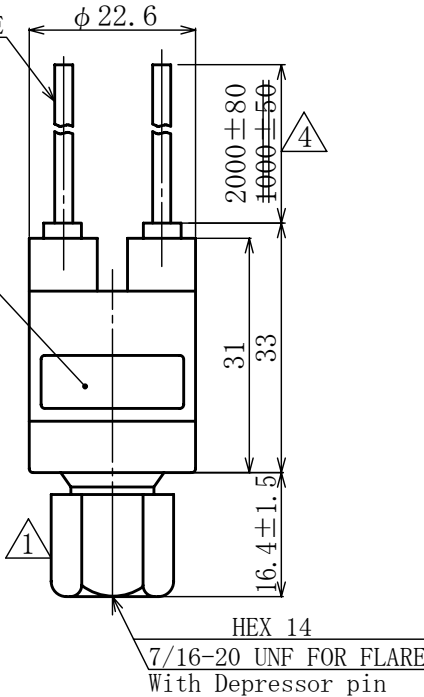

★CONFIRMATION OF DESIGN VALIDITY

We manufacture the product based on the specifications described in this drawing. Please check the safety and validity in the product design in consideration that the product is conformed to the system or not when using.

NOV. 10. '03	5	INK STAMPING -> LABEL
AUG. 21. '03	4	REV. WIRE LENGTH
AUG. 20. '02	3	REV. INK STAMPING
JUN. 12. '02	2	REV. INK STAMPING & REV. MAX. PRESS.
03. SEP. '01	1	REV. CONNECTION & REV. CATALOG No.
DATE	SIGN	CHANGE CONTENT

OPERATING PRESS. CHARACTERISTICS.	OPERATING PRESS. SETTING		DIFFERENTIAL			
	UNIT: bar					
	OFF	O	N			
	23.5±1	17.5±1.5	—			
ELECTRICAL RATINGS	RATED VOLTAGE (V)		PF	A	C	DC
	RATED AMPS. (A)		Cos ϕ	125	250	12
	NON-INDUCTIVE AMPS.		1	1~6	1~4	1~4
	INDUCTIVE AMPS.	FULL LOAD AMPS.	0.75	1~6	1~4	—
STARTING AMPS.		0.45	1~24	1~16	—	
TYPE OF CONTACT	<p>PRESS. RISING</p>					
CONTACT RESISTANCE	LESS THAN 200 m Ω					
INSULATION RESISTANCE	NOT LESS THAN 100 M Ω AT DC 500V MEGGER					
DIELECTRIC STRENGTH	WITHSTAND 1500V AC FOR ONE MINUTE					
MAX. PRESSURE	2	35 bar	33 bar			
AIR TIGHT PRESS.	40 bar					
TEST PRESS.	50 bar					
MAX. ALLOW. TEMP.	-30 ~ 100 °C (But no freeze)					
DURABILITY	100,000 TIMES					

Checked by	Date	Name	TYPE CB PRESSURE SWITCH		
T. T.	14. JUNE 2001				
Designed by	Scale	Catalog Number	Drawing Number		
	1:1	ACB-PB88	1	N-CB-20977-5	
Drawn by	Code No. :061F 8141				
K. H.					

