
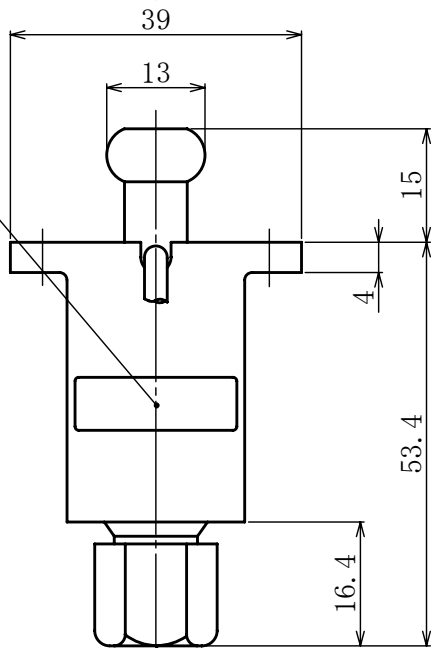



HEAT PROOF ELECTRIC VINYL WIRE
UL1015, AWG18, 105°C (λ=1500±50)

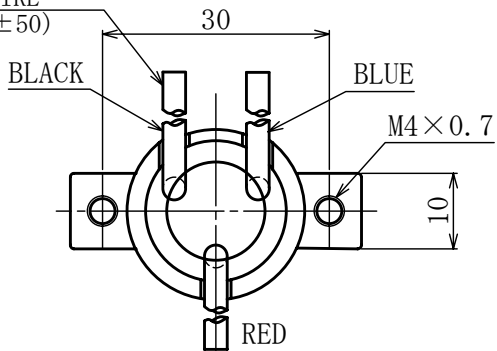

HEX 14
7/16-20 UNF FOR FLARE
With Depressor pin

LABEL

335 NC 275 psi	23 NC 19 bar	ACB-2UC63MW	MFG. No.
TS -22/158°F	PS 35 bar	061F9243	
4A 250V AC	TS -30/ 85°C		
	4A 250V AC	DIN PZH 10102	

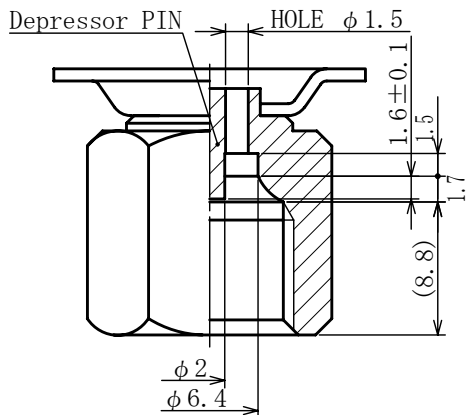


(2:1)

★CONFIRMATION OF DESIGN VALIDITY

We manufacture the product based on the specifications described in this drawing. Please check the safety and validity in the product design in consideration that the product is conformed to the system or not when using.

DATE	SIGN	CHANGE CONTENT

OPERATING PRESS. CHARACTERISTICS.	OPERATING PRESS. SETTING UNIT: bar (psi)		DIFFERENTIAL
	OFF	ON	
ELECTRICAL RATINGS	23±0.7 {335±10}	19±1.2 {275±17}	—
	RATED VOLTAGE (V)		A C
	RATED AMPS. (A)		250
	INDUCTIVE AMPS.		1~4

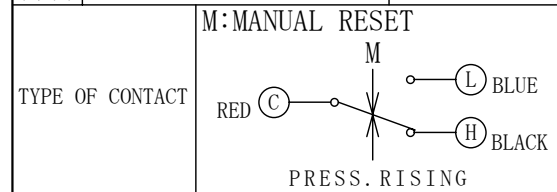

CONTACT RESISTANCE	LESS THAN 200 mΩ
INSULATION RESISTANCE	NOT LESS THAN 100 MΩ AT DC 500V MEGGER
DIELECTRIC STRENGTH	WITHSTAND 1500V AC FOR ONE MINUTE
MAX. PRESSURE	35 bar {500 psi}
AIR TIGHT PRESS.	40 bar {580 psi}
TEST PRESS.	50 bar {725 psi}
MAX. ALLOW. TEMP.	AMBIENT TEMP. -30 ~ 85°C (But no freeze) FLUID TEMP. -54 ~ 135°C
DURABILITY	10,000 TIMES
TUV APPROVED	EN 12263 DIN 32733 (DWK PZH 10102)

Checked by	Date	Name
T. T.	JUN. 08 2005	TYPE CB PRESSURE SWITCH
Designed by	Scale	Catalog Number
	1:1	ACB-2UC63MW
		Drawing Number
		N-CB-70178
Drawn by	Code No. :061F 9243	
K. H.		

