
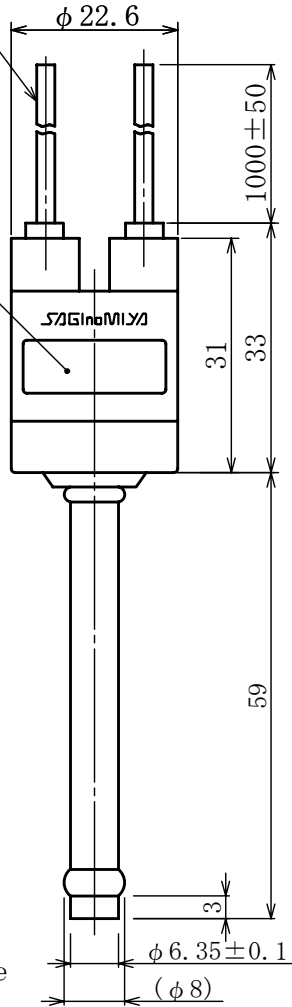


AT BRAZING OF PIPES, WRAP THE SWITCH BODY WITH WET CLOTH AND KEEP THE TEMPERATURE OF SWITCH BODY UNDER 100°C

HEAT PROOF ELECTRIC VINYL WIRE
UL1015, AWG18, 105°C (BLACK)

LABEL



★CONFIRMATION OF DESIGN VALIDITY

We manufacture the product based on the specifications described in this drawing. Please check the safety and validity in the product design in consideration that the product is conformed to the system or not when using.

| | | |
|------|------|----------------|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| DATE | SIGN | CHANGE CONTENT |

| | | | | | | |
|-----------------------------------|---|-----------------|--------------|------|-----|-----|
| OPERATING PRESS. CHARACTERISTICS. | OPERATING PRESS. SETTING | | DIFFERENTIAL | | | |
| | UNIT: bar | | | | | |
| | OFF | O N | | | | |
| | 13±1.5 | 18±1 | | — | | |
| ELECTRICAL RATINGS | RATED VOLTAGE (V) | | PF | A C | DC | |
| | RATED AMPS. (A) | | Cos φ | 125 | 250 | 12 |
| | NON-INDUCTIVE AMPS. | | 1 | 1~6 | 1~4 | 1~4 |
| | INDUCTIVE AMPS. | FULL LOAD AMPS. | 0.75 | 1~6 | 1~4 | — |
| STARTING AMPS. | | 0.45 | 1~24 | 1~16 | — | |
| TYPE OF CONTACT | | | | | | |
| CONTACT RESISTANCE | LESS THAN 200 m Ω | | | | | |
| INSULATION RESISTANCE | NOT LESS THAN 100 M Ω AT DC 500V MEGGER | | | | | |
| DIELECTRIC STRENGTH | WITHSTAND 1500V AC FOR ONE MINUTE | | | | | |
| MAX. PRESSURE | 35 bar | | | | | |
| AIR TIGHT PRESS. | 40 bar | | | | | |
| TEST PRESS. | 50 bar | | | | | |
| MAX. ALLOW. TEMP. | -30 ~ 100 °C (But no freeze) | | | | | |
| DURABILITY | 100,000 TIMES | | | | | |

| | | | | |
|-------------|---------------------|----------------|-------------------------|--|
| Checked by | Date | Name | TYPE CB PRESSURE SWITCH | |
| T. T. | JAN 25 2005 | | | |
| Designed by | Scale | Catalog Number | Drawing Number | |
| | 1:1 | ACB-JA92 | N-CB-21714 | |
| Drawn by | Code No. :061F 8441 | | | |
| K. H. | | | | |

