



Only to the extent expressly agreed by us this document may constitute a contractual obligation on our part

This document and its contents are the exclusive property of Alfa Laval AB and must not be copied, reproduced, transmitted or communicated to any other party or used for purposes not expressly permitted by us.

Front side

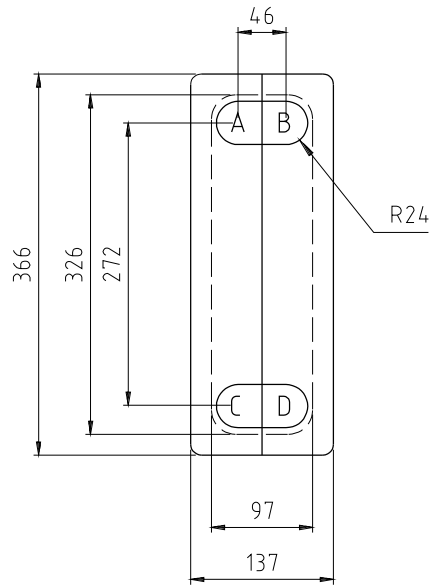

Top side



Type	Type	L	K	Art.No.
CB18 / 0-20	CB20 / 0-30	100	60	34562138-01
CB18 / 21-40	CB20 / 31-60	145	105	34562138-02

SÄRSKILDA KRAV
SPEC. REQUIREMENTS

Kanter brutna
Grader avlagsnade
Ytjämnhet Ra

Edges broken
Burr removed
Surface roughn. in Ra

Toleranser där ej annat angetts. Avser spånavsckilj, bearbetn., klippta eller stansade ytor.
Tolerances where not stated. Chip cutting, shearing or punching.

Basmått Basic size	Tol.
(1)	6 ± 0.2
(6)	30 ± 0.5
(30)	120 ± 0.8
(120)	315 ± 1.2
(315)	1000 ± 2
(1000)	2000 ± 3
(2000)	4000 ± 4

Qty	Item	Article No.	Name/Designation	Material (final condition)/Blank	Note							
		34562138-XX	ISOLATION BLACK	EPP	See tabel							
Assembly No.	Dept.	PC CHE	Date	071218	Scale	1:5	Title	INSULATION EPP BLACK CB20 / CB18 BHE / FHE	Drawing No.	34562138	Rev. No.	1
	Drawn	EMC	Approved	RBR 071219	First angle projection ISO method E							
	DESIGN NOTIFICATION											
	Project No.:											
Change Level:			Column for type CB18 added.									