

HydroControl VGC

Double regulating and commissioning valve with roll grooves PN 25, DN 65...300



The HydroControl VGC is a double regulating and commissioning valve with roll grooves for the static hydronic balancing of pipelines in closed heating and cooling systems. It offers a measuring function across the valve seat.

The HydroControl VGC consists of a flow optimised Y-pattern body with roll grooves, a valve insert with double O-ring sealing, ergonomically designed handwheel, low pitch and sophisticated cone shaped plug as well as two Classic measuring valves. All functions are accessible from the top and include the following:

- Accurate flow regulation
- Reproducible, blockable and lead sealable infinitely adjustable presetting
- Pipeline shutoff
- Flow measurement connection
- Optional filling, bleeding and draining
- Optional connection of the impulse tube of a differential pressure regulator

Features

- + Complete portfolio up to nominal size DN 300
- + With roll grooves, suitable for couplings of the systems Victaulic, Grinnell or similar systems
- + Pressure rating PN 25

Technical data

| HydroControl VGC | |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------|
| Nominal sizes | DN 65...300 73.0...323.9 mm |
| Operating temperature | -10...150°C |
| Operating pressure | Max. 25 bar |
| Medium | Heating and cooling water according to VDI 2035 or ÖNORM 5195 Water-glycol mixtures with a max. glycol content of 50 % |
| Kvs values | 98...1,600 |
| Storage temperature | -20...+60 °C |

Product Details

Functions

Flow regulation

Flow regulation is done by limiting the valve lift and hence the opening between plug and seat. The low pitch allows very precise setting. The plug position is displayed on a scale on the handwheel. This value is the presetting value.

The HydroControl has an almost linear characteristic line and a wide flow range evenly graded over all nominal sizes. As is typical for regulating valves, the control quality decreases the smaller the opening is between plug and seat. Very small presettings are therefore not recommended for the HydroControl and are generally not specified.

Presetting

- Infinitely: all intermediate values are adjustable
- Reproducible: when the valve is closed, it can only be opened up to the set presetting value
- Blockable: Valves up to and including DN 50 can be blocked at the presetting position, i.e. locked against opening or closing. The blocking set item no. 1060180 is required for this (see chapter Accessories, further on)
- Lead sealable: the valve can be additionally lead sealed, e.g. with the wire seal kit item no. 1089091 (see chapter Accessories)

Shutoff

Turning the handwheel clockwise until it stops shuts off the pipeline tightly.

Flow determination

Each HydroControl VGC is equipped with two Classic measuring valves in order to be able to measure the differential pressure and thus determine the flow rate. The Oventrop OV-DMC 3 measuring device contains the required measuring needles and the characteristic lines of all HydroControl VGC are stored as standard.

Due to the patented measuring arrangement (measuring chamber is routed around the valve insert to the measuring connection), the pressure difference measured at the measuring valves almost matches the actual pressure difference of the valve.

FILLING, DRAINING AND BLEEDING

For filling, draining and bleeding, one or both Classic measuring valves can be replaced with fill and drain ball valves. For replacement, the valve must be depressurised. To ensure tightness, use the fill and drain ball valve item no. 1060191 (see chapter Accessories).

A flow determination can still be carried out, as the necessary adapters for connection to fill and drain ball valves are included with the OV-DMC 3 measuring device.

IMPULSE TUBE CONNECTION

To connect an impulse tube, one of the measuring valves must also be replaced with a fill and drain ball valve. The impulse tube of the differential pressure regulator is connected to the hose connection of the fill and drain ball valve. Flow determination by the HydroControl VGC is then only possible with a separate measuring adapter item no. 1060299 (see chapter Accessories).


CONNECTION OF AN OV-DMC 3

The measuring hoses of an OV-DMC 3 measuring device can be connected to the Classic measuring valves with needle adapters. The needle adapters are supplied with the OV-DMC 3.

Materials


| Component | Nominal size | Material |
|--------------------|--------------|---------------------------------------------------------------|
| Handwheel assembly | All | Polyamide plastic PA6 |
| Body | All | Cast iron EN-GJL-250 according to EN 1561 (GG-25) |
| Bonnet | DN 65...150 | Bronze CC491K (Rg5) |
| | DN 200...300 | Nodular cast iron EN-GJS-400-15 according to EN 1563 (GGG-40) |
| Bonnet sealing | All | 2 x EPDM O-ring |
| Spindle | All | Dezincification resistant brass CW602 |
| Spindle sealing | All | 2 x EPDM O-ring |
| Plug | All | Bronze CC491K (Rg5) |
| Seat sealing | All | PTFE |
| Measuring valves | All | Dezincification resistant brass CW602 |

Dimensions and Item Numbers
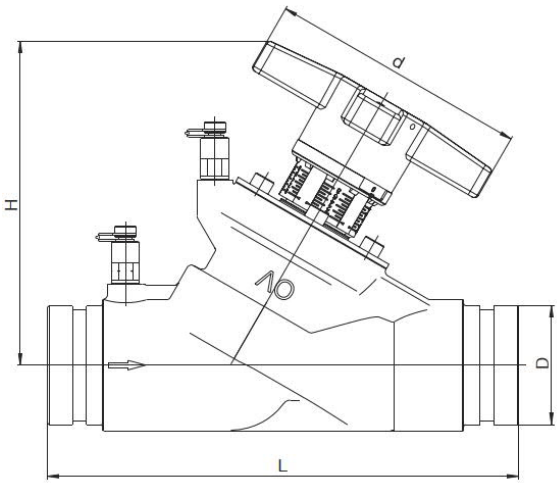
| | DN | Inch | Kvs | D [mm] | L [mm] | H [mm] | d [mm] | Item no. |
|------------------------------------------------------------------------------------|------------|------|---------|---------|--------|--------|---------|----------|
|  | 65 | 2½ | 98 | 73.0 | 290 | 200 | 160 | 1063051 |
| | | | | 76.1 | | | | 1064051 |
| | 80 | 3 | 122 | 88.9 | 310 | 215 | 160 | 1063052 |
| | | | | 1063053 | | | | |
| | 100 | 4 | 201 | 114.3 | 350 | 244 | 160 | 1063053 |
| | | | | 1063054 | | | | |
| | 125 | 5 | 293 | 141.3 | 400 | 289 | 160 | 1063054 |
| | | | | 139.7 | | | | 1064054 |
| | 150 | 6 | 404 | 168.3 | 480 | 293 | 160 | 1063055 |
| | | | | 165.1 | | | | 1064055 |
| 200 | 8 | 815 | 219.1 | 600 | 467 | 300 | 1063056 | |
| | | | 1063057 | | | | | |
| 250 | 10 | 1200 | 273.0 | 730 | 480 | 300 | 1063057 | |
| | | | 1063058 | | | | | |
| 300 | 12 | 1600 | 323.9 | 850 | 515 | 300 | 1063058 | |
| | | | | | | | | |

All specifications in mm.

Installation

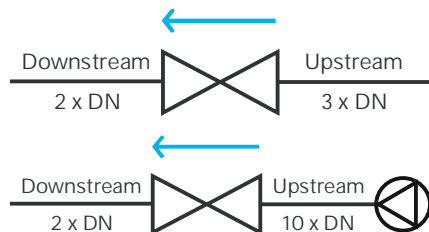


- Calming sections of 3 x DN upstream and 2 x DN downstream of the valve should be provided.
- When installing directly downstream of a pump, a calming section of 10 x DN should be provided.
- The valve must be installed correctly in the flow direction which is indicated by an arrow on the body.

Accessories


Thermal insulation shell

Made of polyurethane rigid foam with polystyrene shell. For heating and cooling systems. Operating temperature -10 to 130 °C. Building material class B2 according to DIN 4102. Meets the requirements of Appendix 8 to Sections 69 and 71(1) line ee) of the German Building Energy Act (GEG). Cold insulation: Min. medium temperature 6 °C, shells have to be bonded hermetically. Restricted diffusion tightness at low medium temperature and at high ambient temperature and/or air humidity.


| | Suitable for | Item no. |
|-----------------------------------------------------------------------------------|--------------|----------|
|  | DN 65 | 1062586 |
| | DN 80 | 1062587 |
| | DN 100 | 1062588 |
| | DN 125 | 1062589 |
| | DN 150 | 1062590 |

Spindle extension 35 mm

For valve insulation with commercially available insulation material. Not to be used in combination with the Oventrop thermal insulation shells.


| | Suitable for | Item no. |
|-------------------------------------------------------------------------------------|--------------|----------|
|  | DN 65...150 | 1688297 |

Measuring valve extension

| | Suitable for | Item no. |
|------------------------------------------------------------------------------------|--------------------------------|----------|
|  | for all nominal sizes 80 mm | 1060295 |
| | for all nominal sizes 40 mm | 1688295 |


Wire seal kit

10-fold, consisting of seal and sealing wire.


| | Suitable for | Item no. |
|-------------------------------------------------------------------------------------|-------------------|----------|
|  | All nominal sizes | 1089091 |

Identification ring


10-fold, for riser identification, can be clipped onto the handwheel.

| | Colour | Item no. |
|------------------------------------------------------------------------------------|--------|----------|
|  | Blue | 1069650 |
| | Red | 1069651 |

Fill and drain ball valve

| | Suitable for | Item no. |
|------------------------------------------------------------------------------------|-------------------|----------|
|  | All nominal sizes | 1060191 |

Measuring adapter, 2-fold

| | Suitable for | Item no. |
|-------------------------------------------------------------------------------------|-------------------|----------|
|  | All nominal sizes | 1060299 |


Sizing

This data sheet offers you various options to size your HydroControl VGC:

- Use the alignment chart below for a quick sizing across all nominal sizes.
- Use the Kv value tables and flow charts in the "Flow data" section for an accurate determination of the presetting value.
- At the end of the data sheet you will find information on the exact Kv value calculation taking into account the medium temperature. Furthermore, you will find information on the approximate calculation of corrected flow values when using glycol mixtures.

Alignment chart

The alignment chart allows a quick, graphic determination of the nominal sizes that come into question by drawing a horizontal line from the Kv value in the left scale to the right. If the line crosses the blue area, the corresponding nominal size fits. In the case below, the suitable nominal sizes for a Kv value of 50 are sought (red line). All nominal sizes up to and including DN 200 fit. (However, in this case you should avoid the DN 200 nominal size, as regulating valves generally do not like to be operated in the lower range). The item numbers are listed below the alignment chart.

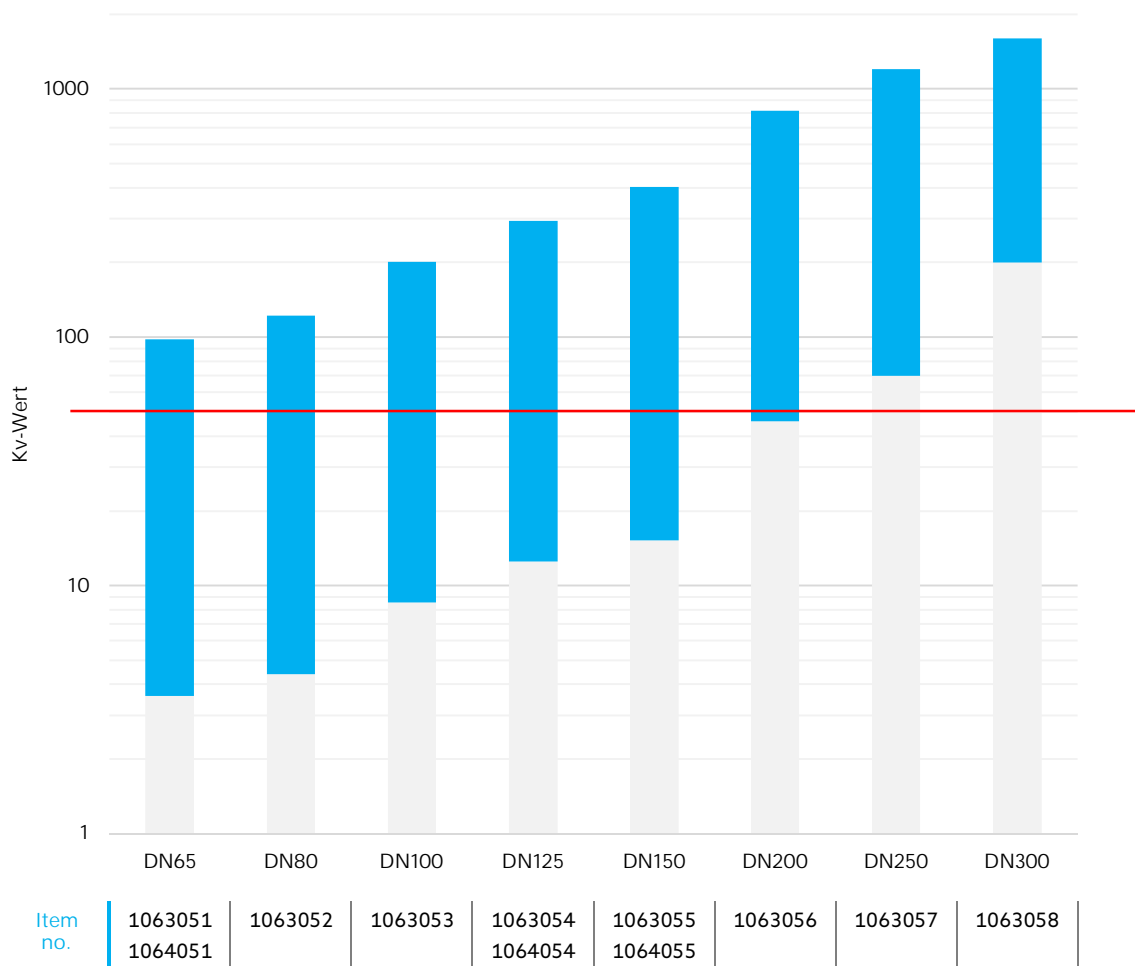

Flow Data DN 65 to DN 150

Kv Values DN65

| Pre-decimal point | Decimal point presetting | | | | | | | | | |
|-------------------|--------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | .0 | .1 | .2 | .3 | .4 | .5 | .6 | .7 | .8 | .9 |
| 1 | 3.60 | 4.12 | 4.49 | 4.86 | 5.23 | 5.60 | 6.43 | 7.29 | 8.17 | 9.07 |
| 2 | 10.00 | 10.95 | 11.91 | 12.92 | 13.94 | 15.00 | 16.66 | 18.38 | 20.14 | 21.95 |
| 3 | 24.00 | 25.73 | 27.70 | 29.74 | 31.84 | 34.00 | 35.93 | 37.84 | 39.74 | 41.63 |
| 4 | 43.50 | 45.36 | 47.20 | 49.03 | 50.85 | 52.00 | 54.45 | 56.23 | 58.00 | 59.74 |
| 5 | 61.00 | 63.21 | 64.93 | 66.63 | 68.32 | 70.00 | 71.69 | 73.33 | 74.93 | 76.48 |
| 6 | 78.00 | 79.48 | 80.91 | 82.31 | 83.67 | 85.00 | 86.12 | 87.20 | 88.23 | 89.23 |
| 7 | 90.00 | 91.13 | 92.02 | 92.89 | 93.71 | 94.50 | 95.27 | 96.00 | 96.70 | 97.36 |
| 8 | 98.00 | | | | | | | | | |

Kv Values DN 80

| Pre-decimal point | Decimal point presetting | | | | | | | | | |
|-------------------|--------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | .0 | .1 | .2 | .3 | .4 | .5 | .6 | .7 | .8 | .9 |
| 1 | 4.40 | 4.74 | 5.17 | 5.67 | 6.28 | 7.00 | 7.89 | 8.82 | 9.78 | 10.79 |
| 2 | 11.85 | 12.95 | 14.11 | 15.33 | 16.61 | 18.65 | 19.39 | 20.90 | 22.51 | 24.24 |
| 3 | 26.10 | 27.85 | 29.61 | 31.39 | 33.19 | 35.00 | 36.83 | 38.68 | 40.55 | 42.43 |
| 4 | 44.75 | 46.27 | 48.21 | 50.19 | 52.18 | 55.20 | 56.22 | 58.28 | 60.36 | 62.47 |
| 5 | 64.60 | 66.98 | 69.32 | 71.63 | 73.90 | 75.45 | 78.37 | 80.56 | 82.72 | 84.85 |
| 6 | 87.00 | 89.04 | 91.00 | 93.13 | 95.14 | 97.55 | 99.10 | 101.04 | 102.96 | 104.87 |
| 7 | 106.75 | 108.39 | 110.00 | 111.60 | 113.00 | 114.50 | 116.13 | 117.78 | 119.27 | 120.74 |
| 8 | 122.20 | | | | | | | | | |

Kv Values DN 100

| Pre-decimal point | Decimal point presetting | | | | | | | | | |
|-------------------|--------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | .0 | .1 | .2 | .3 | .4 | .5 | .6 | .7 | .8 | .9 |
| 1 | 8.55 | 9.58 | 10.61 | 11.64 | 12.67 | 14.00 | 14.73 | 15.76 | 16.79 | 17.82 |
| 2 | 18.50 | 19.88 | 20.91 | 21.94 | 22.97 | 24.00 | 26.00 | 28.13 | 30.40 | 32.81 |
| 3 | 35.40 | 38.18 | 41.17 | 44.44 | 48.02 | 52.00 | 55.93 | 59.89 | 63.89 | 67.92 |
| 4 | 72.00 | 76.11 | 80.27 | 84.47 | 88.71 | 93.00 | 97.37 | 101.62 | 105.74 | 109.75 |
| 5 | 112.00 | 117.46 | 121.17 | 124.79 | 127.52 | 132.00 | 135.16 | 138.47 | 141.71 | 144.89 |
| 6 | 148.00 | 151.94 | 155.63 | 159.10 | 162.38 | 164.03 | 168.44 | 171.26 | 173.95 | 176.53 |
| 7 | 179.01 | 181.37 | 183.65 | 185.85 | 187.96 | 190.04 | 192.37 | 194.66 | 196.85 | 198.96 |
| 8 | 201.00 | | | | | | | | | |


Kv Values DN 125

| Pre-decimal point | Decimal point presetting | | | | | | | | | |
|-------------------|--------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | .0 | .1 | .2 | .3 | .4 | .5 | .6 | .7 | .8 | .9 |
| 1 | 12.45 | 13.84 | 15.23 | 16.62 | 18.01 | 19.40 | 20.94 | 22.47 | 24.01 | 25.54 |
| 2 | 26.60 | 28.61 | 30.15 | 31.36 | 33.22 | 34.75 | 37.18 | 39.69 | 42.29 | 44.97 |
| 3 | 47.75 | 50.63 | 53.62 | 56.73 | 60.00 | 63.35 | 66.62 | 70.00 | 73.53 | 77.21 |
| 4 | 81.05 | 85.05 | 89.30 | 93.77 | 98.50 | 103.55 | 108.16 | 112.92 | 117.84 | 122.95 |
| 5 | 128.25 | 133.77 | 139.54 | 145.60 | 151.96 | 158.70 | 164.10 | 169.60 | 175.21 | 180.94 |
| 6 | 185.30 | 192.75 | 198.85 | 205.10 | 211.50 | 218.05 | 223.37 | 228.64 | 233.89 | 239.03 |
| 7 | 244.15 | 249.23 | 254.26 | 259.25 | 264.19 | 268.15 | 273.95 | 278.77 | 283.55 | 287.96 |
| 8 | 293.00 | | | | | | | | | |

Kv Values DN 150

| Pre-decimal point | Decimal point presetting | | | | | | | | | |
|-------------------|--------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | .0 | .1 | .2 | .3 | .4 | .5 | .6 | .7 | .8 | .9 |
| 1 | 15.22 | 17.22 | 19.23 | 21.23 | 23.24 | 25.26 | 27.24 | 29.50 | 31.25 | 33.26 |
| 2 | 35.26 | 37.13 | 39.41 | 42.30 | 46.25 | 53.92 | 61.00 | 68.55 | 76.64 | 85.40 |
| 3 | 95.02 | 105.51 | 114.45 | 122.36 | 129.52 | 135.45 | 142.21 | 147.41 | 153.33 | 160.00 |
| 4 | 167.12 | 174.48 | 181.76 | 189.05 | 196.34 | 203.65 | 210.78 | 217.79 | 224.14 | 231.46 |
| 5 | 238.91 | 244.72 | 251.20 | 257.60 | 263.90 | 272.40 | 276.24 | 282.30 | 288.27 | 294.17 |
| 6 | 300.40 | 305.76 | 311.45 | 317.08 | 322.07 | 326.70 | 333.58 | 338.34 | 344.29 | 349.56 |
| 7 | 355.60 | 360.00 | 365.06 | 370.13 | 375.15 | 382.00 | 385.04 | 389.34 | 394.20 | 399.54 |
| 8 | 404.30 | | | | | | | | | |

Tolerance Curve DN 65 to DN 150

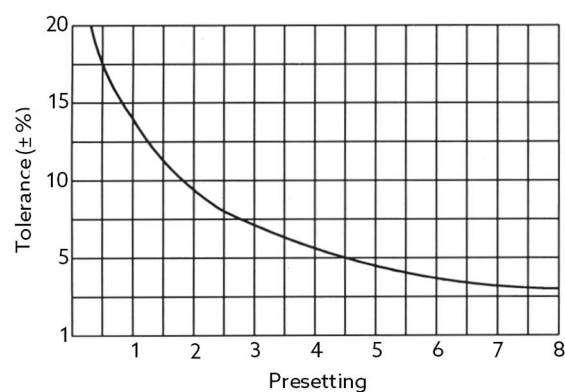

Flow Data DN 200 to DN 300

Kv Values DN 200

| Pre-decimal point | Decimal point presetting | | | | | | | | | |
|-------------------|--------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | .0 | .1 | .2 | .3 | .4 | .5 | .6 | .7 | .8 | .9 |
| 2 | 45.9 | 51.6 | 54.2 | 55.8 | 59.4 | 62.0 | 66.4 | 70.8 | 75.2 | 79.8 |
| 3 | 84.0 | 90.0 | 96.0 | 102.0 | 108.0 | 114.0 | 121.0 | 128.6 | 136.2 | 143.6 |
| 4 | 151.0 | 162.0 | 173.0 | 184.0 | 195.0 | 206.0 | 216.8 | 227.6 | 238.4 | 249.2 |
| 5 | 260.3 | 271.9 | 283.8 | 295.6 | 307.5 | 320.0 | 332.0 | 344.8 | 357.6 | 370.3 |
| 6 | 383.0 | 396.0 | 409.0 | 422.0 | 435.0 | 447.8 | 460.0 | 472.6 | 484.8 | 497.2 |
| 7 | 509.5 | 519.4 | 529.3 | 539.2 | 549.1 | 559.0 | 571.0 | 582.5 | 594.2 | 606.0 |
| 8 | 618.0 | 626.8 | 634.8 | 643.2 | 651.6 | 660.0 | 672.8 | 665.2 | 693.7 | 711.6 |
| 9 | 724.5 | 731.4 | 738.2 | 744.9 | 751.7 | 758.5 | 760.6 | 762.7 | 764.8 | 766.9 |
| 10 | 769.0 | 771.2 | 773.4 | 775.6 | 778.0 | 780.0 | 782.0 | 784.0 | 786.0 | 788.0 |
| 11 | 790.0 | 792.2 | 794.6 | 796.8 | 799.1 | 801.4 | 804.0 | 806.6 | 809.2 | 812.0 |
| 12 | 814.5 | | | | | | | | | |


Kv Values DN 250

| Pre-decimal point | Decimal point presetting | | | | | | | | | |
|-------------------|--------------------------|------|-------|-------|------|-------|------|------|------|-------|
| | .0 | .1 | .2 | .3 | .4 | .5 | .6 | .7 | .8 | .9 |
| 2 | 70 | 72.5 | 75.5 | 79 | 82 | 85 | 89.5 | 94 | 99 | 104.5 |
| 3 | 110 | 117 | 123.5 | 130.5 | 139 | 150 | 155 | 164 | 174 | 184 |
| 4 | 195 | 208 | 221 | 236 | 252 | 270 | 287 | 304 | 321 | 338 |
| 5 | 356 | 373 | 390 | 407 | 423 | 440 | 457 | 473 | 490 | 506 |
| 6 | 522 | 539 | 555 | 571 | 587 | 607 | 619 | 635 | 651 | 666 |
| 7 | 682 | 698 | 714 | 729 | 745 | 760 | 778 | 795 | 811 | 826 |
| 8 | 840 | 850 | 860 | 870 | 880 | 890 | 899 | 907 | 916 | 925 |
| 9 | 933 | 942 | 952 | 961 | 970 | 980 | 989 | 998 | 1008 | 1018 |
| 10 | 1028 | 1038 | 1048 | 1059 | 1071 | 1080 | 1088 | 1096 | 1104 | 1112 |
| 11 | 1120 | 1128 | 1136 | 1144 | 1152 | 11160 | 1168 | 1176 | 1184 | 1192 |
| 12 | 1200 | | | | | | | | | |

Kv Values DN 300


| Pre-decimal point | Decimal point presetting ⁶ | | | | | | | | | |
|-------------------|---------------------------------------|------|------|------|------|------|------|------|------|------|
| | .0 | .1 | .2 | .3 | .4 | .5 | .6 | .7 | .8 | .9 |
| 2 | 200 | 210 | 220 | 230 | 240 | 250 | 261 | 273 | 285 | 297 |
| 3 | 310 | 323 | 336 | 350 | 365 | 380 | 401 | 421 | 441 | 461 |
| 4 | 480 | 499 | 517 | 535 | 553 | 570 | 588 | 606 | 624 | 642 |
| 5 | 660 | 678 | 696 | 714 | 732 | 750 | 771 | 791 | 810 | 828 |
| 6 | 845 | 861 | 877 | 892 | 906 | 920 | 933 | 947 | 961 | 975 |
| 7 | 990 | 1005 | 1020 | 1036 | 1053 | 1070 | 1084 | 1098 | 1112 | 1126 |
| 8 | 1140 | 1154 | 1168 | 1182 | 1196 | 1210 | 1228 | 1245 | 1261 | 1276 |
| 9 | 1290 | 1303 | 1316 | 1328 | 1339 | 1350 | 1365 | 1379 | 1393 | 1407 |
| 10 | 1420 | 1433 | 1446 | 1457 | 1468 | 1480 | 1490 | 1500 | 1510 | 1520 |
| 11 | 1530 | 1539 | 1547 | 1555 | 1563 | 1570 | 1577 | 1583 | 1589 | 1595 |
| 12 | 1600 | | | | | | | | | |

Tolerance Curve DN 200 to DN 300

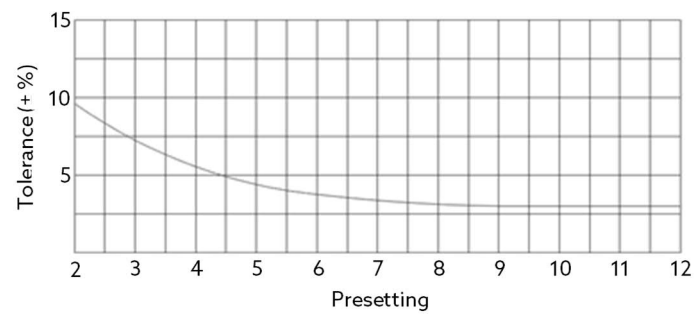


Flow Charts


DN 65

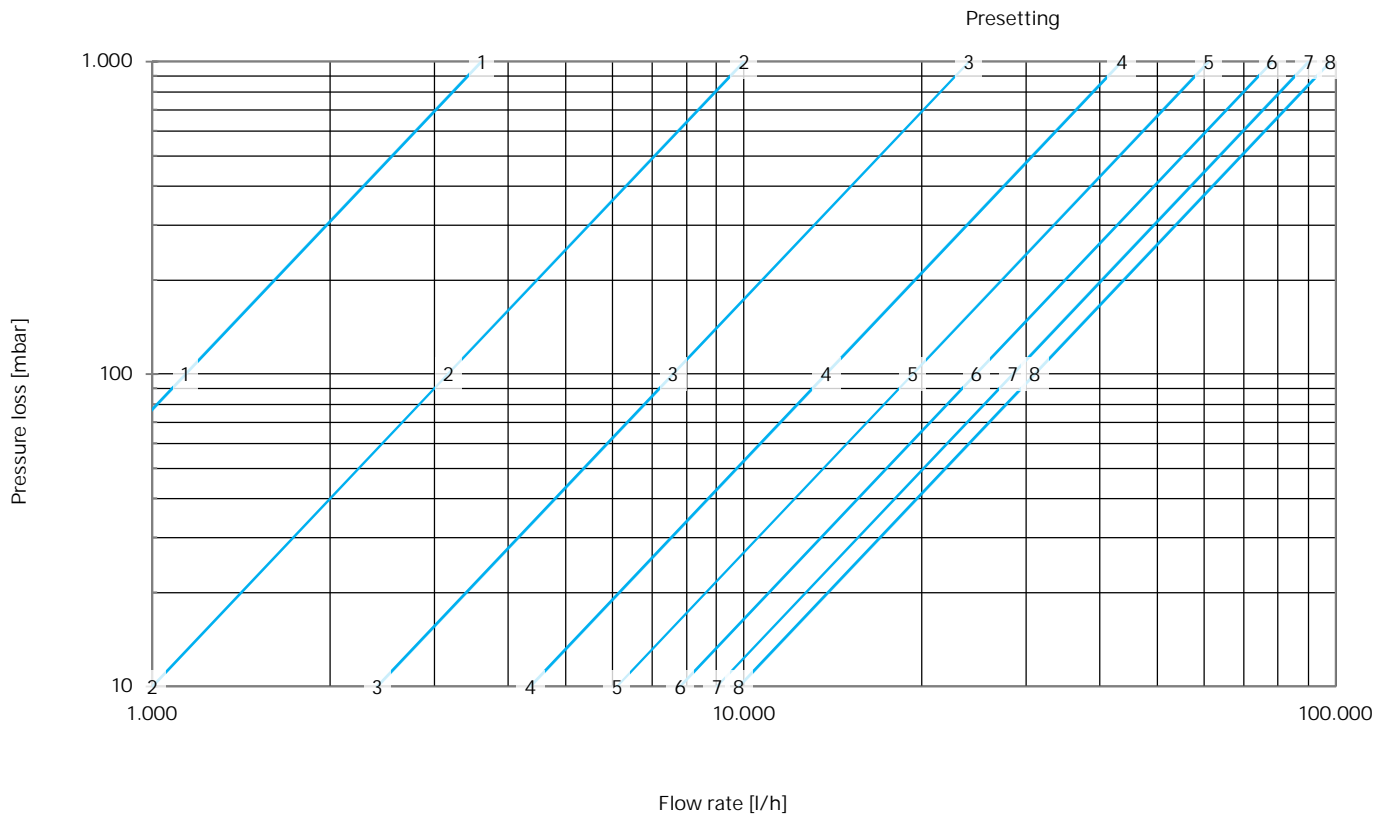


DN 80

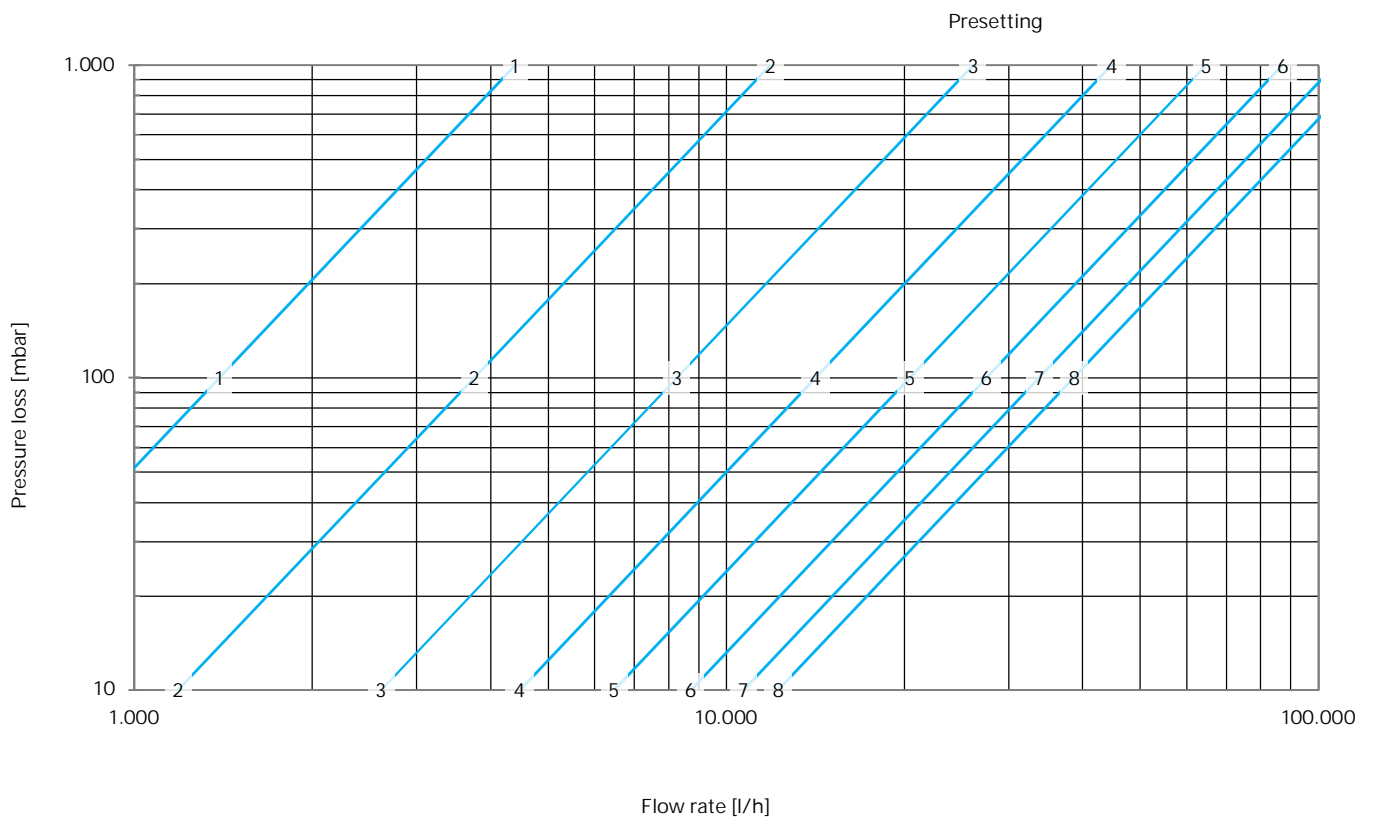


DN 100

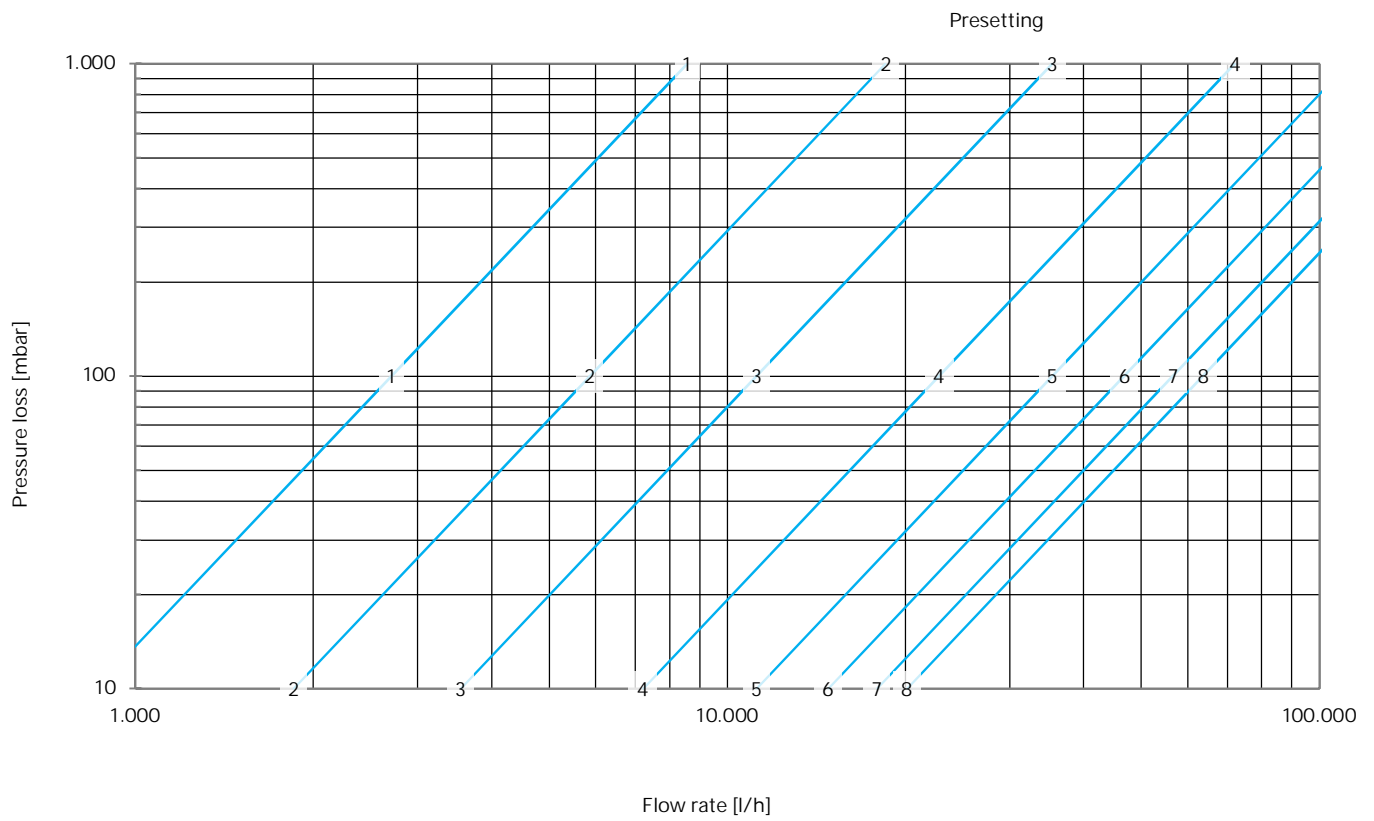


DN 125

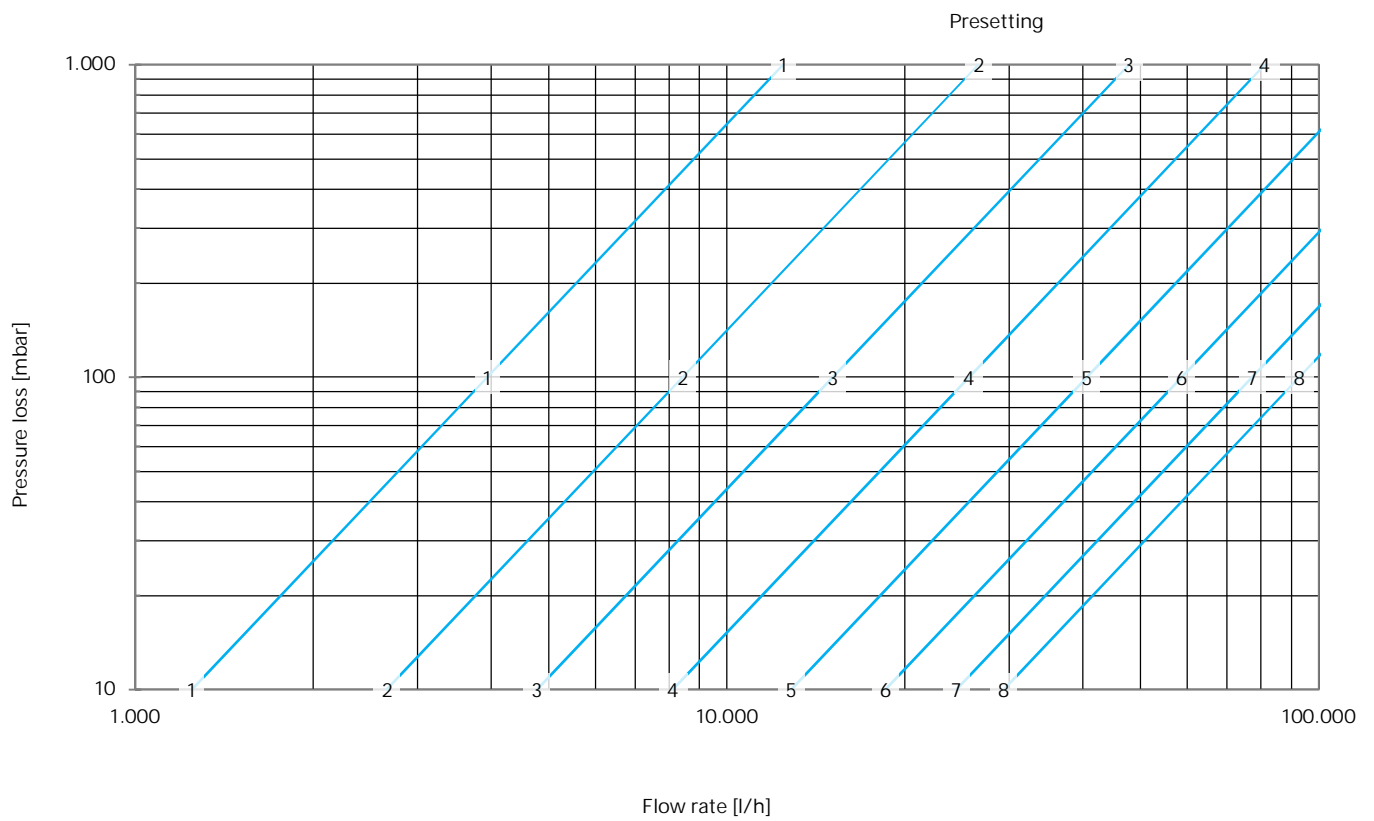


DN 150

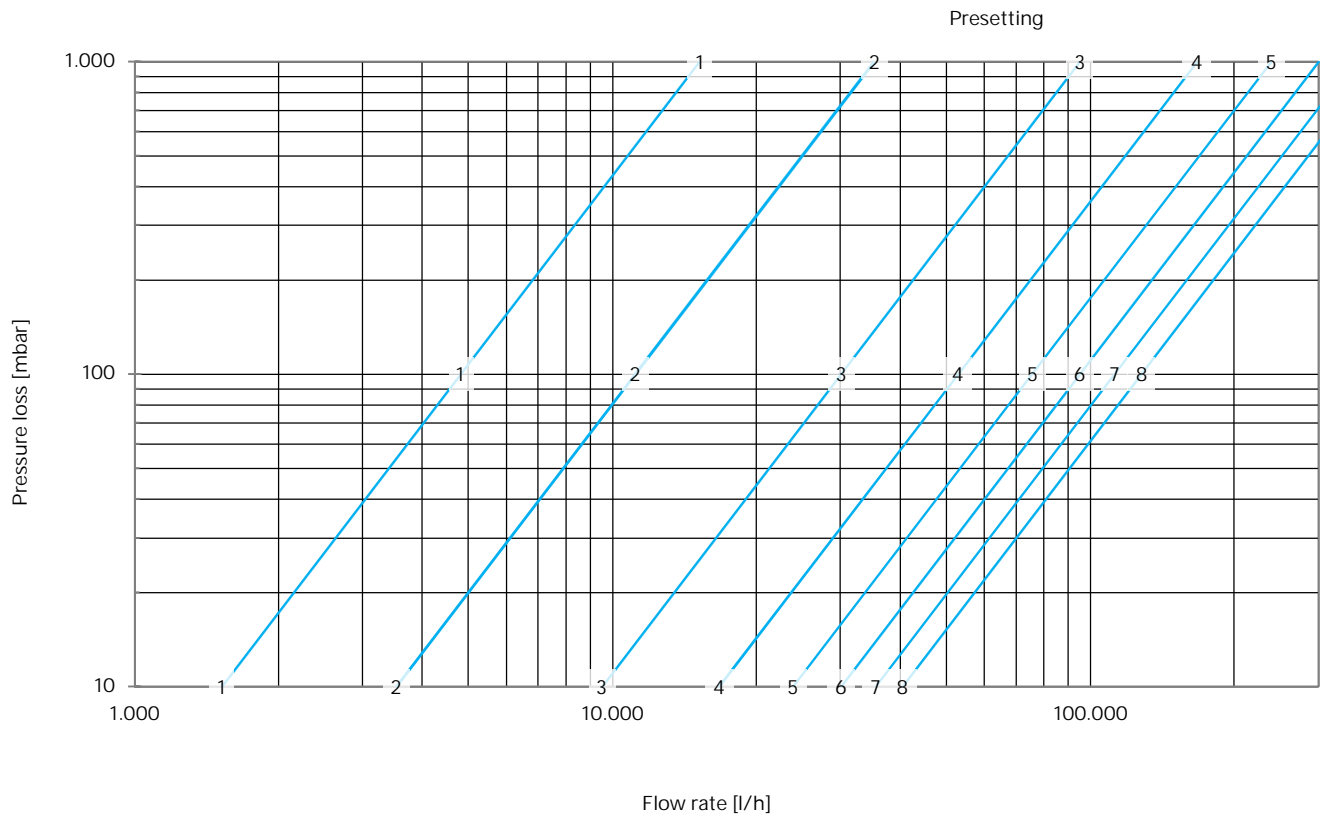


DN 200

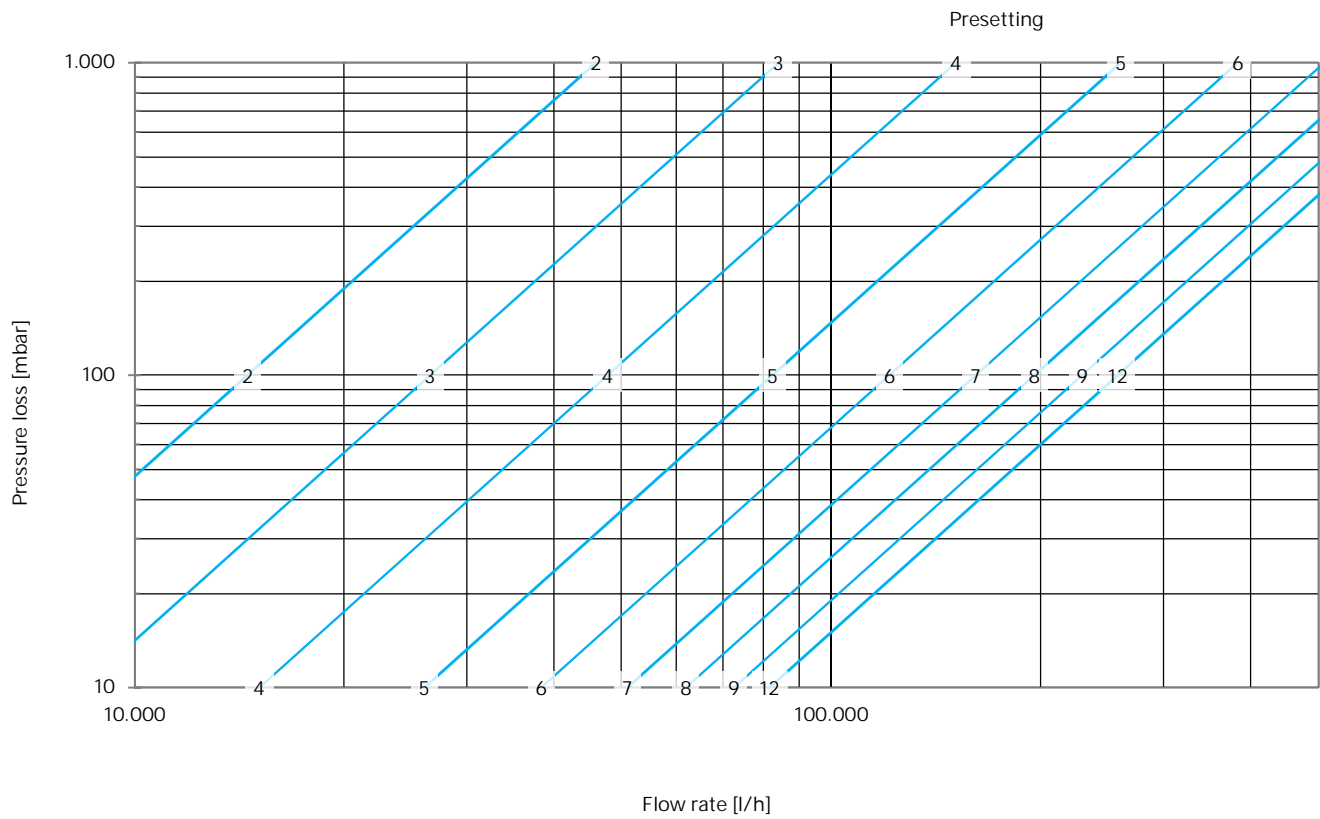

DN 250

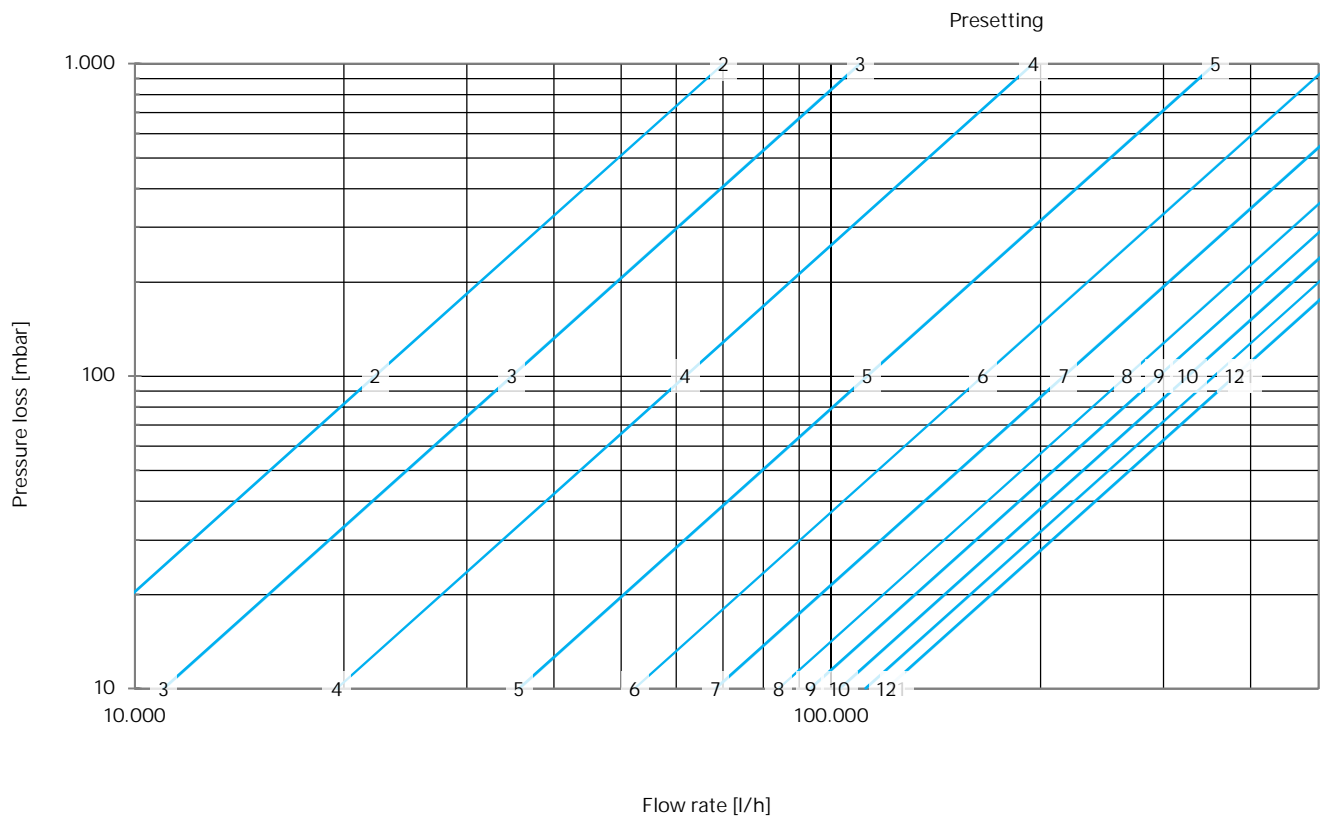

DN 300

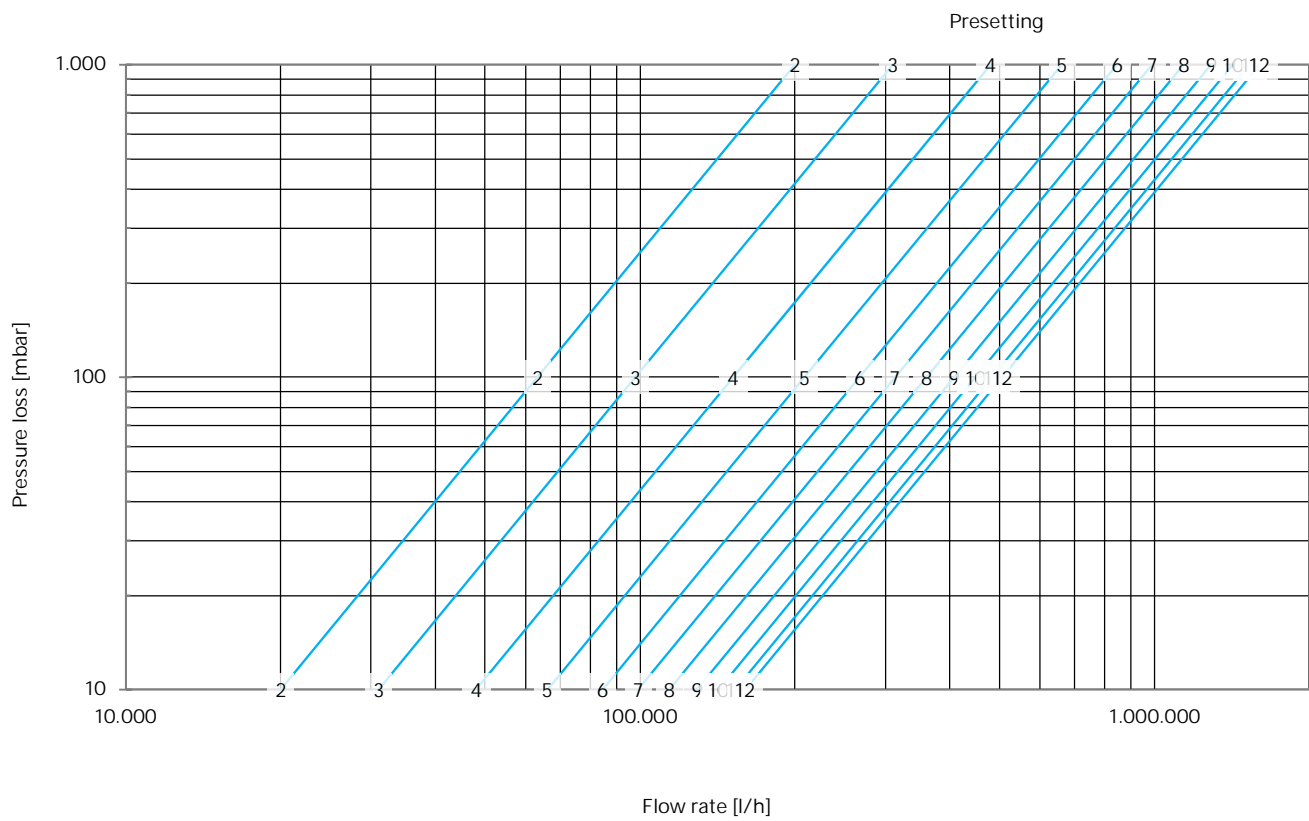

Kv Value Calculation

The flow coefficient Kv is the volume of water in m³ that flows through an opening within one hour with a pressure loss of 1 bar. For control and regulating valves, this opening is typically the gap between the valve seat and the valve plug. The required Kv value can be easily calculated with the Kv formula:

$$Kv = Q \times \sqrt{\frac{1 \text{ bar}}{\Delta P} \times \frac{\rho}{1000 \frac{\text{kg}}{\text{m}^3}}}$$

- Q is the volume flow in m³/h
- ΔP is the pressure loss in bar
- ρ is the density in kg/m³ — water with a temperature of 4 °C has a density of 1,000 kg/m³. At 50 °C water has a density of 988 kg/m³, at 70 °C of 978 kg/m³ and at 100 °C of 958 kg/m³

For use with Excel or other spreadsheets, the formula is:

$$=Q*\text{ROOT}((1/DP)*(p/1000))$$

| C4 | A | B | C | D | E |
|----|---------------|----|-----------------------|---|---|
| | Volume flow | Q | 0.5 m ³ /h | | |
| | Pressure loss | Dp | 0.1 bar | | |
| | Density | p | 988 kg/m ³ | | |
| | | Kv | 1.57 | | |

The objects in **semibold cyan** are to be replaced by values or cell references. Brackets have been added for easier mapping.

For an accurate Kv value calculation, you need the water temperature so that you can look up the density and enter the value into the formula. If a less precise calculation is sufficient, the formula can be simplified by shortening the second fraction by setting the density to 1,000 kg/m³ - which only applies to a water temperature of 4 °C, as mentioned above. The error in a Kv value calculated in this way is approx. 1 % for water with a temperature of e.g. 70 °C (density 978 kg/m³).

| To be calculated | Formula | Spreadsheet formula |
|-----------------------|-------------------------------------------------------|---------------------|
| Kv value (simplified) | $Kv = Q \times \sqrt{\frac{1 \text{ bar}}{\Delta P}}$ | =Q*ROOT(1/DP) |



Correction Factors

Additives change the viscosity of water and thus its flow properties. Manufacturers of additives often provide calculation aids that take into account the changed properties of the medium when using their products.

The flow data in this data sheet are based on the properties of water without additives. A quick, but only approximate calculation of the changed flow values when using glycol mixtures is made with the correction factor f, which can be used to recalculate the Kv value or the required pressure loss:

| To be calculated | Formula | Spreadsheet formula |
|---------------------------|----------------------------------------------|---------------------|
| Kv value (corrected) | $Kv_{(corr)} = Kv \times \frac{1}{\sqrt{f}}$ | Kv*(1/(ROOT(f))) |
| Pressure loss (corrected) | $\Delta P_{(corr)} = \Delta P \times f$ | DP*f |

The correction factor can be read in the following two charts at the intersection of the values for media temperature and glycol content.

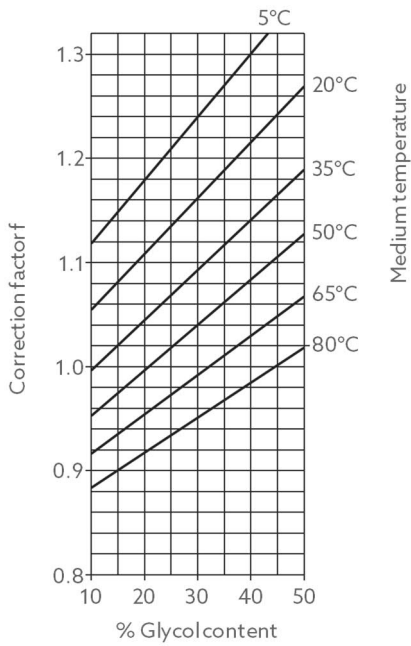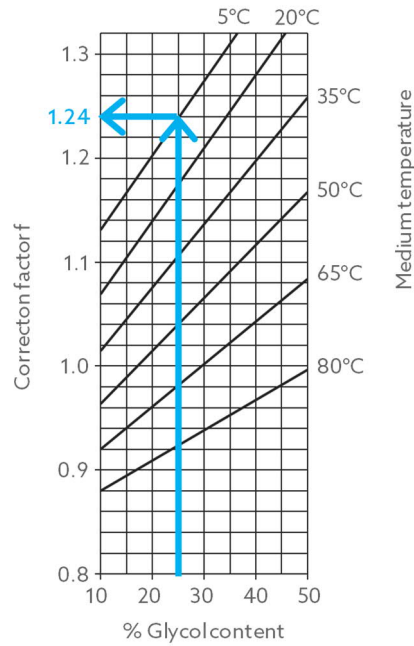Correction factor f for ethylene glycolCorrection factor f for propylene glycol**Example:**

A glycol content of 25 % and a medium temperature of 5 °C result in a factor of 1.24 with the following impacts:

- If the original Kv value was 10, it is now reduced to just short of 9
- If the original flow rate was 10 m³/h, it is now reduced to just short of 9 m³/h (at the same differential pressure)
- If the original differential pressure was 10 kPa, it must now be increased to 12.4 kPa to ensure the same flow rate

Subject to change without notice • All rights reserved • © 2023 Oventrop GmbH & Co. KG
EN-03102-106305-DB-V2132 – July 2022