



## Product information

Automatic air-/particle separator of steel. Gas-/particle separator and dirt protection mechanism.

Dimension range (DN)	50 - 300
PN	10
Temperature (°C)	0 - 110
Main material	Steel



## Area of use

Exvoid TW for automatic air separation of heating and cooling systems where the fluid is water. Can be mounted in systems with a mix of water/glycol and water/ethanol (max 50% concentration), if control and oversight is increased. The valve should not be used in systems with a mix of water/salts. Separates effective microbubbles.

## Tender text

### **PSF.141 Traps for air**

AT 8070-... automatic air separator in steel, PN10, with a large air chamber and dirt protection mechanism.

## Quality assurance

PED 2014/68/EU

Fulfills the AFS 1999:4, 8§ standards and shall not be CE-marked. All separators are functional- and density tested.


**Product marking:** Marked with dimension, max. operating pressure, max. operating temperature and the manufacturers name.

## Energy and environment declaration

**Product Bvb:** Accepted

**Product BVB ID:** 110739

Pos	Component	Material
-----	-----------	----------

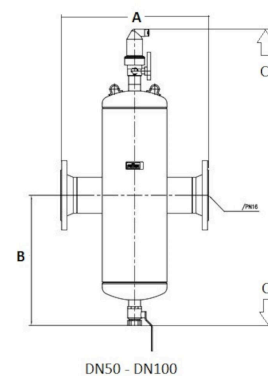

## Measurements and weight

**Dimension range (DN):** 50 - 300

DN	A	B	C
50	350	335	785
65	350	335	785
80	470	413	940
100	470	413	940
125	635	622	1186
150	635	622	1186
200	775	757	1456
250	890	964	1876
300	1005	1129	2196

## Function and design

The unique construction removes loose air as well as dirt particles. The surface magnifier generates motionless zones above and below the flow. The air rises in the motionless zone to be collected in the air chamber and is then released through the automatic valve. Dirt particles that are heavier than water settle and are collected in the dirt chamber to flush out the system through the drain valve. This can be done during full operation. The velocity decreases as the fluid flows into the separation body. Free gas bubbles, particles and sludge separate while passing through the separator.

Separate bubbles lift and enter the float body. The liquid level goes down and the float sinks. When the float, that is connected to the separation mechanism via a bar, reaches a certain level, the mechanism is affected and air can flow into the free. When the float rises again, the mechanism closes.

The large volume of the air chamber and special design makes the liquid level never reach the drainage mechanism.

## Technical data

**Main material:** Steel

**Included materials:** Steel


**Temperature (°C):** 0 - 110

**PN:** 10

**Connection:** Flanged EN1092

**ETIM classification:** EC010260 - Air-/dirt separator for central heating/cooling system

**Product colour:** RAL 7040 - Window grey

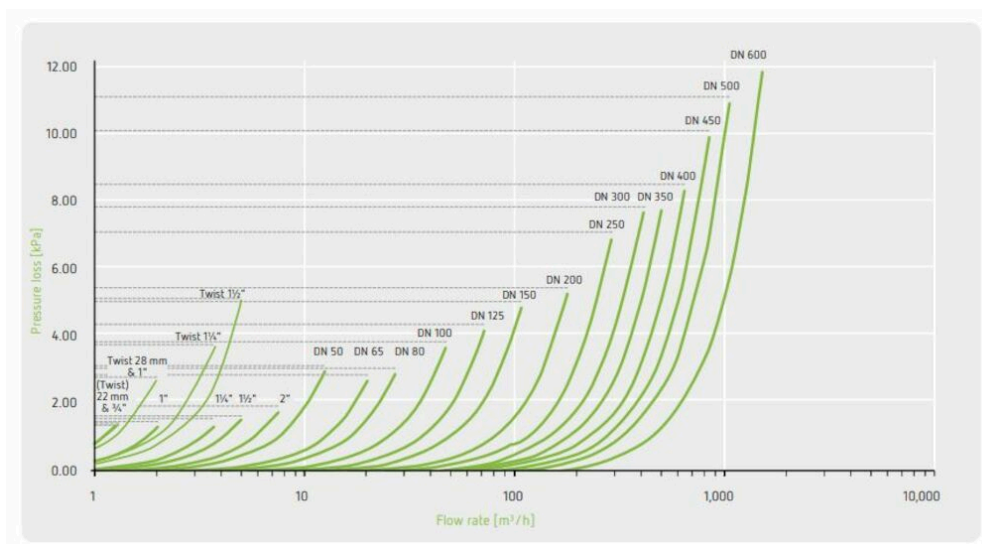

## Installation and maintenance

**Possible mounting position:** Horizontal

Since the micro bubbles are released at the hottest point in the plant, the component should be placed on the hottest point in the system. In a heating system, the warmest point is usually on the supply line, as close to the heater as possible.

Maintenance free, no filter changes are necessary. However, for a good- and safe operation, the sludge chamber must be emptied regularly.

Please feel free to contact us

We answer your questions by e-mail and telephone. No question is too small, no challenge is too big. You are always welcome at Armatec.

[info@armatec.se](mailto:info@armatec.se) | +46 31 89 01 00 | [www.armatec.se](http://www.armatec.se)

THE COMPANY'S MANAGEMENT SYSTEM  
IS CERTIFIED BY DNV  
ISO 9001 • ISO 14001